



FINISAR[®]

Latest Trends in Data Center Optics

RIPE 72 - Copenhagen
May 25, 2016

Christian Urricariet



Finisar Corporation

World's Largest Supplier of Fiber Optic Components and Subsystems

- ◆ Optics industry leader with \$1B+ in annual revenue
- ◆ Founded in 1988
- ◆ IPO in 1999 (NASDAQ: FNSR)
- ◆ 14,000 employees
- ◆ Best-in-class broad product line
- ◆ Vertically integrated with low cost manufacturing
- ◆ Significant focus on R&D and capacity expansion
- ◆ Experienced management team
- ◆ 1300+ Issued U.S. patents



Broad Product Portfolio and Customer Base

DATACOM

PRODUCTS



CUSTOMERS



TELECOM

PRODUCTS




CUSTOMERS




New Architectures in Hyperscale Data Centers

- ◆ Most data center networks have been architected on a 3-tier topology
- ◆ Cloud data center networks are migrating from traditional 3-tier to flattened 2-tier topology
 - ◆ Hyperscale Data Centers becoming larger, more modular, more homogenous
 - ◆ Workloads spread across 10s, 100s, sometimes 1000s of VMs and hosts
 - ◆ Higher degree of east-west traffic across network (server to server)

Traditional '3-tier' Tree Network


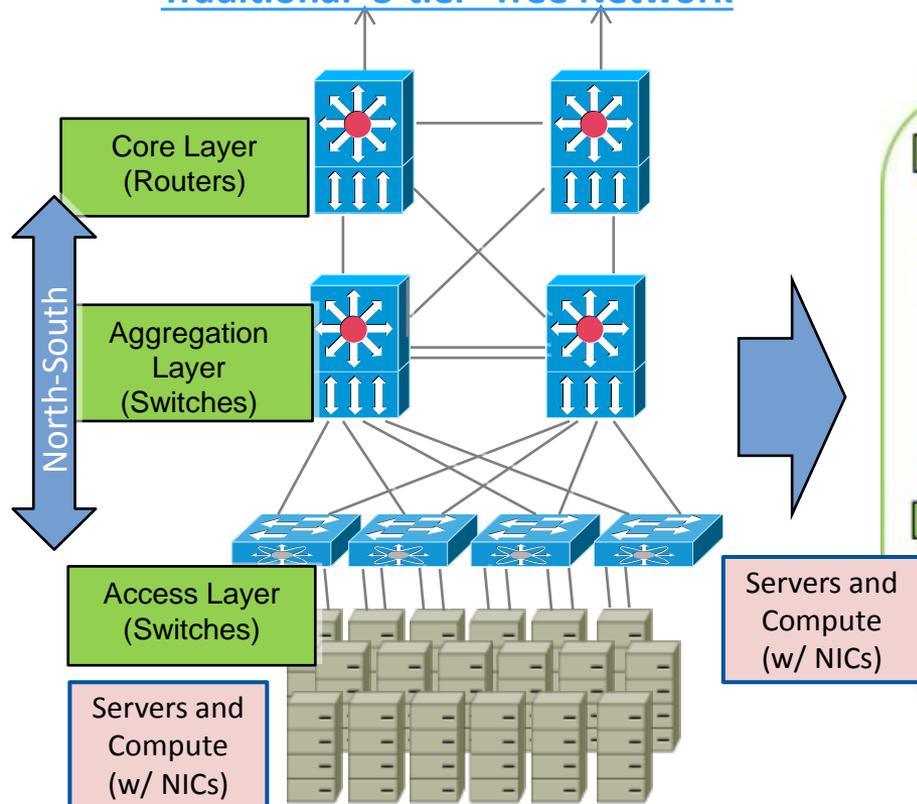


New '2-tier' Leaf-Spine Network

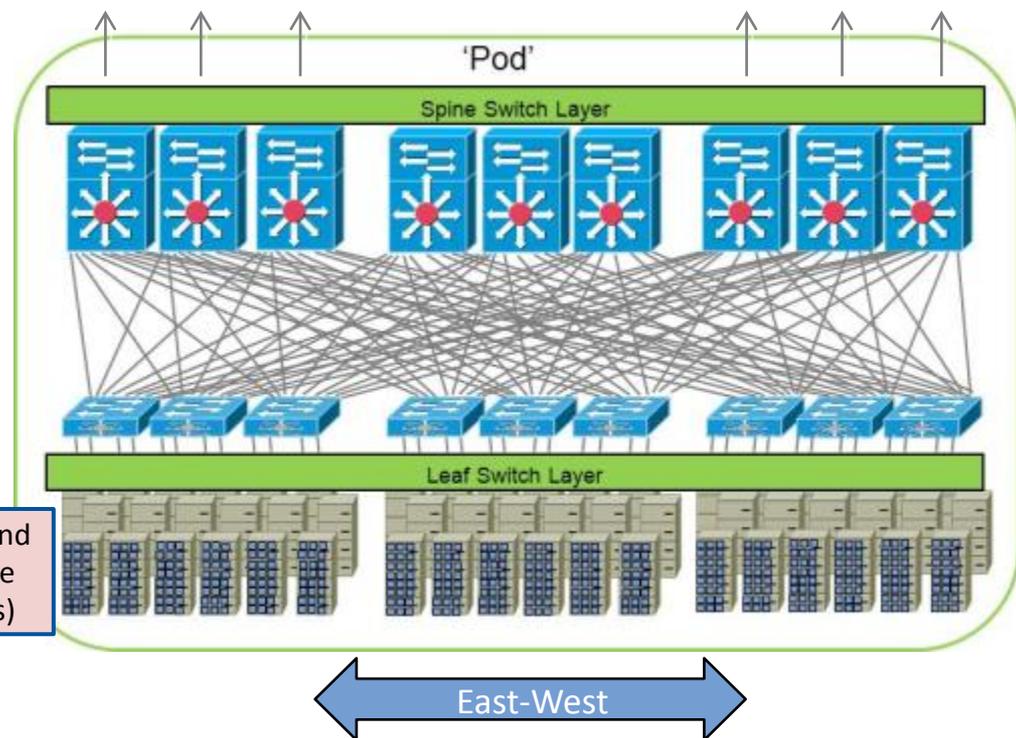


Data Center Connections are Evolving

- ◆ Due to the significant increase in bandwidth demand, Data Center connections are moving from 1G/10G, to 25G/40G/100G
- ◆ Within the Data Center Rack
 - **10GE** being deployed now
 - **25GE** to be deployed soon
 - 50GE to the server will likely follow
- ◆ Between Data Center Racks
 - **40GE** being deployed now
 - **100GE** to be deployed soon
 - What follows? 200GE or 400GE?
- ◆ Long Spans/DCI & WAN
 - **100GE** being deployed now
 - **400GE** being standardized now
 - What follows? 800GE, 1TE or 1.6TE?

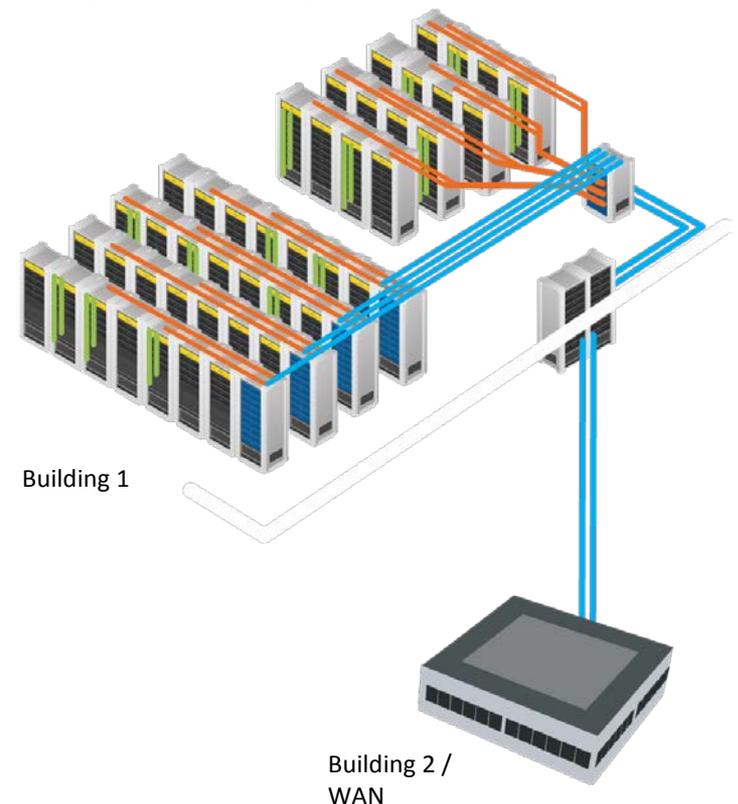

Optical Trends in the Data Center Market

- ◆ Significant increase in 100G and 25G port density
 - Smaller form factors, e.g., QSFP28 modules
 - 100G power dissipation $< 3.5\text{W}$
 - Cost-effective Active Optical Cables
 - On-board optics for very high port density

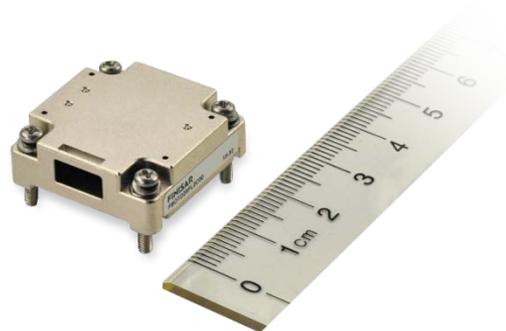

100G Optical Module Form Factor Evolution



CFP
4 ports/chassis
24W

CFP2
8-10 ports/chassis
8W

CFP4
16-18 ports/chassis
5W

QSFP28
18-20 ports/chassis
3.5W

Deployments today

time

100G QSFP28 Module




◆ 100GE optical transceivers

- QSFP28 is standardized by SFF-8665 (SFF Committee)
- It has a 4-lane, retimed 25G I/O electrical interface (CAUI-4)
- Supports up to 3.5W power dissipation with standard cooling
- Also used for 4x 25GE applications

◆ 100GE active optical cables (no optical connector)

4x25G Breakout

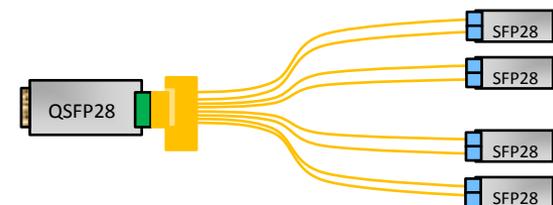

QSFP28 is the 100GE module form factor of choice for new data center switches

25G SFP28 Module




◆ 25GE optical transceivers

- SFP28 is standardized by the SFF Committee
- It has a 1-lane, retimed 25G I/O electrical interface
- Supports up to 1W power dissipation with standard cooling
- Used for 25GE ports in server and switches

◆ 25GE active optical cables

SFP28 is the 25GE module form factor of choice for new Servers / NICs

Board-Mounted Optical Assembly (BOA)

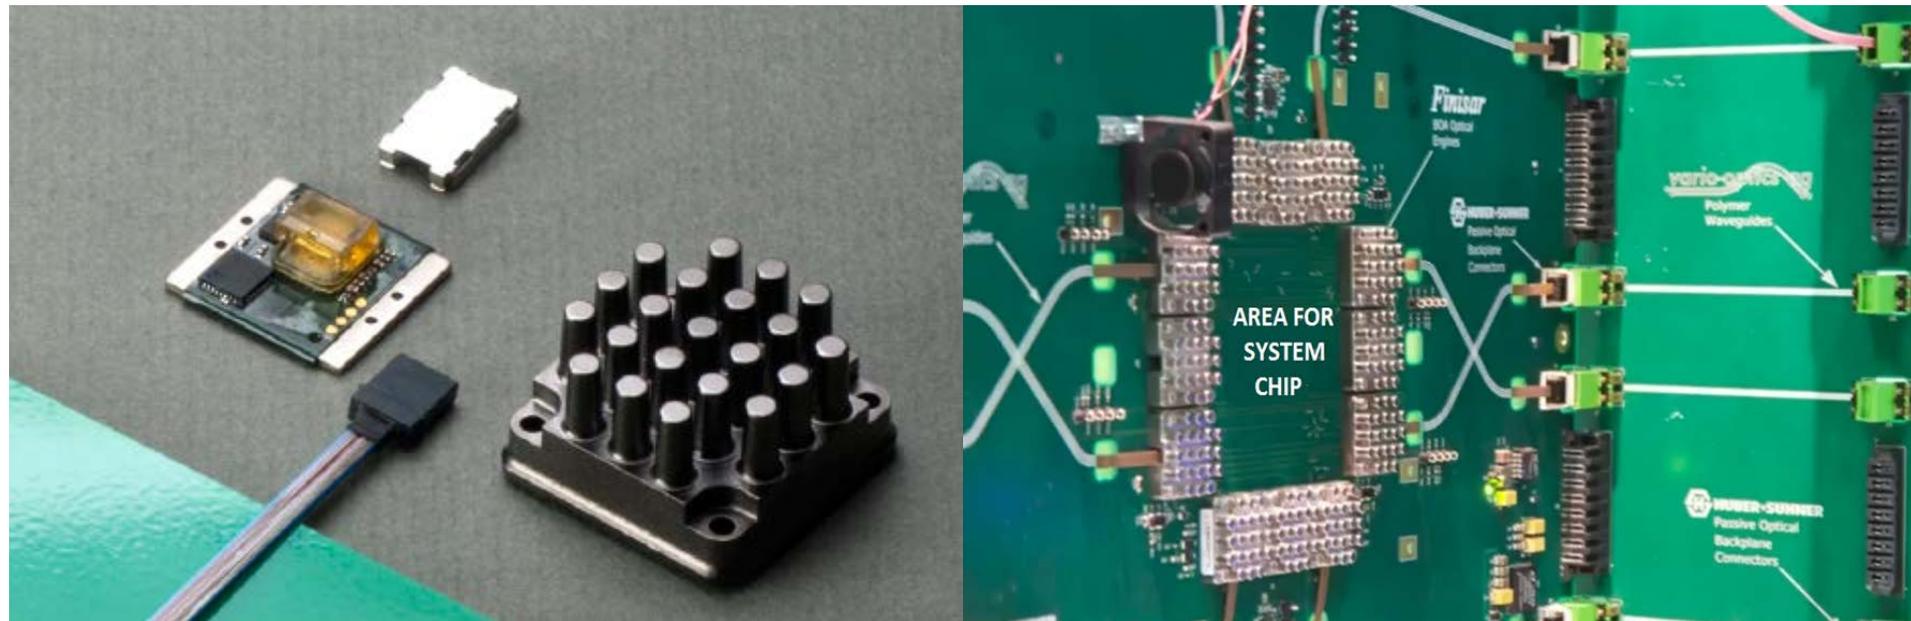

- ◆ These optics are not pluggable; they are mounted on the host PCB
- ◆ Used today on supercomputers and some routers and switches
- ◆ Very short host PCB traces enable low power dissipation
- ◆ Higher bandwidth density can be achieved by:
 - More channels: Up to 12+12 Tx/Rx, or 24Tx and 24Rx
 - Higher data rate per channel: 10G/ch and 25G/ch variants today, 50G/ch in the future

Optical Trends in the Data Center Market

- ◆ Significant increase in 100G and 25G port density
- ◆ Extension of optical links beyond the Standards

40G Ethernet QSFP+ Modules

	Parallel (MPO)	Duplex (LC)
Multimode	<p>SR4</p> <ul style="list-style-type: none"> • 100/150m <p>eSR4 & 4xSR</p> <ul style="list-style-type: none"> • 300/400m 	<p>A duplex multimode product is required to re-use the same fiber plant used for 10GE</p>
Single Mode	<p>4xLR</p> <ul style="list-style-type: none"> • 10km <p>4xLR Lite</p> <ul style="list-style-type: none"> • 2km 	<p>LR4</p> <ul style="list-style-type: none"> • 10km <p>ER4</p> <ul style="list-style-type: none"> • 40km

Parallel links **can** be broken out to 4 separate 10G connections

Duplex WDM **cannot** be broken out to separate 10G connections

Black = Standardized interfaces

Blue = MSA/Proprietary interfaces



Multimode distances refer to OM3/OM4
Single mode distances refer to SMF28

100G Ethernet QSFP28 Modules

	Parallel (MPO)	Duplex (LC)
Multimode	<p>SR4 & 4x25G-SR</p> <ul style="list-style-type: none"> • 70/100m <p>SR4 without FEC</p> <ul style="list-style-type: none"> • 30/40m 	<p>A duplex multimode product is required to re-use the same fiber plant used for 10GE</p>
Single Mode	<p>PSM4</p> <ul style="list-style-type: none"> • 500m 	<p>LR4</p> <ul style="list-style-type: none"> • 10km <p>CWDM4/CLR4</p> <ul style="list-style-type: none"> • 2km

Parallel links **can** be broken out to 4 separate 25G connections

Duplex WDM **cannot** be broken out to separate 25G connections

Black = Standardized interfaces

Blue = MSA/Proprietary interfaces



Multimode distances refer to OM3/OM4
Single mode distances refer to SMF28

Impact of Latency on 25G/100G Ethernet Optical Links


- ◆ Various recent 25G and 100G Ethernet standards and MSAs require the use of **RS-FEC** (aka, “KR4 FEC”) on the host to increase overall link length.
- ◆ RS-FEC does not increase the total bit rate, but it introduces an additional **latency of ~100ns** in the link.
 - Some applications like HFT have little tolerance for latency.

Standard	Link Length with RS-FEC
IEEE 802.3bm 100GBASE-SR4	100m on OM4 MMF
IEEE P802.3by 25GBASE-SR	100m on OM4 MMF
100G CWDM4 MSA	2km on SMF
100G PSM4 MSA	500m on SMF

- ◆ The fiber propagation time of each bit over 100m of MMF is **~500ns**
→ The amount of additional latency introduced by RS-FEC may be significant for the overall performance of short links <100 meters (see next page).
- ◆ But the fiber propagation time of each bit over 500m of SMF is **~2500ns**
→ The amount of latency introduced by RS-FEC is **not** significant for the overall performance of links >500 meters.

Low-Latency QSFP28 SR4 and SFP28 SR without FEC

- Support of **error-free** 25G/100G Ethernet links **without FEC**
 - Lower latency
 - Lower host power dissipation
- Standard QSFP28 and SFP28 form factors
- Supports 4:1 fan-out configuration
- Up to 30 meters on OM3 / 40 meters on OM4 MMF

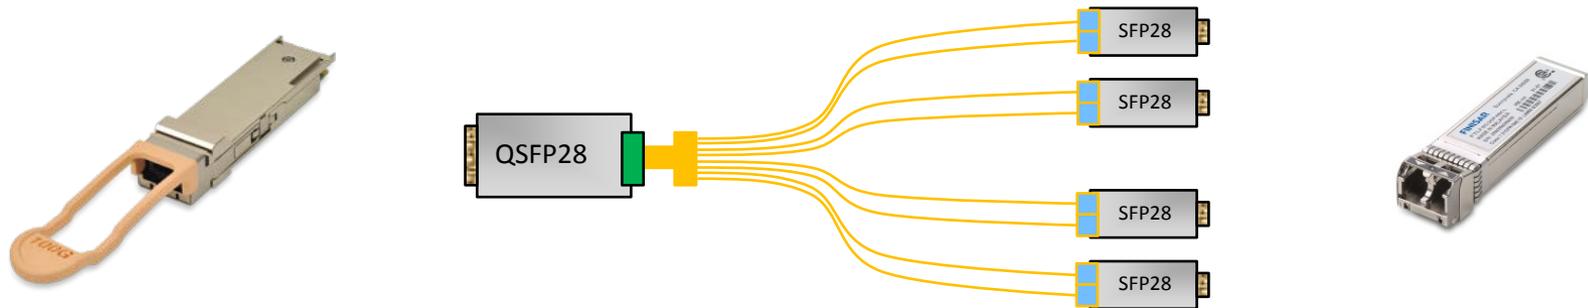

Optical Trends in the Data Center Market

- ◆ Significant increase in 100G and 25G port density
- ◆ Extension of optical links beyond the Standards
- ◆ Reutilization of existing 10G fiber plant on 40G and 100G

Why Duplex Multimode Fiber Matters

◆ For Brownfield Applications:

- Data centers today are architected around 10G Ethernet
- Primarily focused on 10GBASE-SR using **duplex MMF (LC)**

◆ Data center operators are migrating from 10G to 40G or 100G, but want to maintain their existing fiber infrastructure.


- SR4 requires ribbon multimode fiber with an MPO connector.
 - *Not provided by pre-installed fiber plant.*
- LR4 requires single mode fiber.
 - *Not provided by pre-installed fiber plant.*

Data centers want to upgrade from 10G to 40G and 100G
without touching the duplex MMF fiber infrastructure

Introducing Shortwave WDM (SWDM)

- ◆ SWDM uses 4 different wavelengths in the 850nm region, where MMF is optimized, which are optically multiplexed inside the transceiver.
- ◆ SWDM enables the transmission of 40G (4x10G) and 100G (4x25G) over existing duplex multimode fiber, using LC connectors.

Block diagram of a 40G SWDM QSFP+ Transceiver

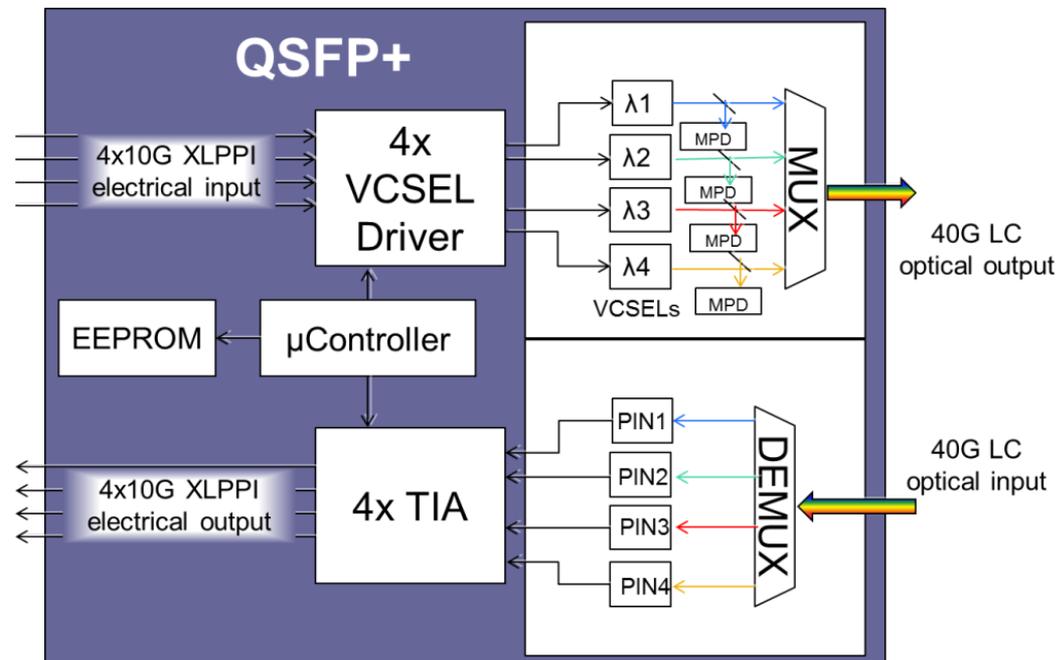

- ◆ Industry group to promote SWDM technology for duplex MMF in data centers.
- ◆ Finisar is a founding member of the SWDM Alliance.
- ◆ More information at www.swdm.org



Shortwave WDM:
Duplex multimode technology for the data center

COMMSCOPE® CORNING DELL

FINISAR® H3C HUAWEI

JUNIPER NETWORKS LUMENTUM ofS
A Furukawa Company

PANDUIT® Prysmian Group

We are a proud member of the SWDM Alliance™

swdm4™

40G Ethernet QSFP+ Modules

	Parallel (MPO)	Duplex (LC)
Multimode	<p>SR4</p> <ul style="list-style-type: none"> • 100/150m <p>eSR4 & 4xSR</p> <ul style="list-style-type: none"> • 300/400m 	<p>Bi-directional</p> <ul style="list-style-type: none"> • Limited use <p>SWDM4</p> <ul style="list-style-type: none"> • Being tested
Single Mode	<p>4xLR</p> <ul style="list-style-type: none"> • 10km <p>4xLR Lite</p> <ul style="list-style-type: none"> • 2km 	<p>LM4</p> <ul style="list-style-type: none"> • 140/160m/1km <p>LR4</p> <ul style="list-style-type: none"> • 10km <p>ER4</p> <ul style="list-style-type: none"> • 40km

Parallel links **can** be broken out to 4 separate 10G connections

Duplex WDM **cannot** be broken out to separate 10G connections

Black = Standardized interfaces

Blue = MSA/Proprietary interfaces



Multimode distances refer to OM3/OM4
Single mode distances refer to SMF28

100G Ethernet QSFP28 Modules

	Parallel (MPO)	Duplex (LC)
Multimode	<p>SR4 & 4x25G-SR</p> <ul style="list-style-type: none"> 70/100m <p>SR4 without FEC</p> <ul style="list-style-type: none"> 30/40m 	<p>SWDM4</p> <ul style="list-style-type: none"> Being tested
Single Mode	<p>PSM4</p> <ul style="list-style-type: none"> 500m 	<p>LR4</p> <ul style="list-style-type: none"> 10km <p>CWDM4/CLR4</p> <ul style="list-style-type: none"> 2km

Parallel links **can** be broken out to 4 separate 25G connections

Duplex WDM **cannot** be broken out to separate 25G connections

Black = Standardized interfaces

Blue = MSA/Proprietary interfaces



Multimode distances refer to OM3/OM4
Single mode distances refer to SMF28

Optical Trends in the Data Center Market

- ◆ Significant increase in 100G and 25G port density
- ◆ Extension of optical links beyond the Standards
- ◆ Reutilization of existing 10G fiber plant on 40G and 100G
- ◆ Moving beyond 100G, to 200G and 400G
 - Service Provider applications
 - Data Center applications

400GE Standardization

- ◆ The 400GE Standard is already being defined in IEEE P802.3bs.

Interface	Link Distance	Media type	Technology
400GBASE-SR16	100 m	32f Parallel MMF	16x25G NRZ Parallel
400GBASE-DR4	500 m	8f Parallel SMF	4x100G PAM4 Parallel
400GBASE-FR8	2 km	2f Duplex SMF	8x50G PAM4 LAN-WDM
400GBASE-LR8	10 km	2f Duplex SMF	8x50G PAM4 LAN-WDM

- Electrical I/O: CDAUI-8 8x50G PAM4
 CDAUI-16 16x25G NRZ
- 400GE Standard is expected to be ratified in December 2017
- ◆ Optics suppliers are already working on components to support these new rates.
 - Based on VCSELs, InP DFB laser and Si Photonics technologies
 - ICs and test platforms that support PAM4 encoding

50G, 200G and Next-Gen 100G Ethernet Standardization

- ◆ 200GE PMD objectives to be studied by IEEE 802.3bs:

Interface	Link Distance	Media type	Technology
200GBASE-SR4	100 m	8f Parallel MMF	4x50G PAM4 850nm
200GBASE-FR4	2 km	2f Duplex SMF	4x50G PAM4 CWDM
200GBASE-LR4	10 km	2f Duplex SMF	4x50G PAM4 CWDM



- ◆ 50GE PMD objectives to be studied by new IEEE Task Force:

Interface	Link Distance	Media type	Technology
50GBASE-SR	100 m	2f Duplex MMF	50G PAM4 850nm
50GBASE-FR	2 km	2f Duplex SMF	50G PAM4 1300nm window
50GBASE-LR	10 km	2f Duplex SMF	50G PAM4 1300nm window

- ◆ Next-Gen 100GE PMD objectives to be studied by new IEEE Task Force:

Interface	Link Distance	Media type	Technology
100GBASE-SR2	100 m	2f Duplex MMF	2x50G TBD
100GBASE-xR2	x km	2f Duplex SMF	2x50G TBD

400GE CFP8 Optical Transceiver Module

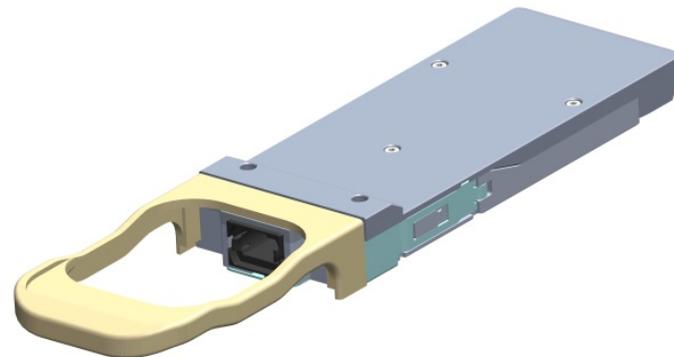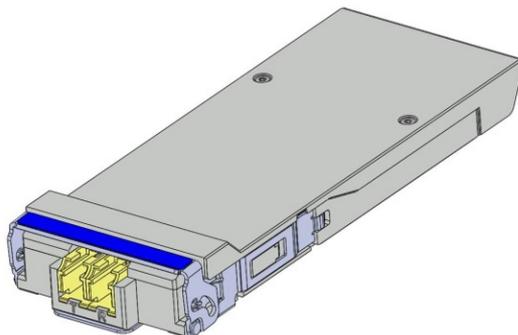


- ◆ **CFP8** is the *first-generation* 400GE form factor.
- ◆ Module dimensions are **slightly smaller than CFP2**.
- ◆ Supports standard IEEE 400G **multimode** and **single mode** interfaces.
- ◆ Supports either **CDAUI-16** (16x25G) or **CDAUI-8** (8x50G) electrical I/O.
- ◆ It is being standardized by the **CFP MSA**.

OFC 2016: 2x50G PAM4 100G Interoperability Demo

- ◆ Error-free **100G link** connecting Juniper Switch with Spirent Tester
- ◆ Using Finisar **QSFP28** prototype modules with **2x50G PAM4 technology**
- ◆ Demonstrates building blocks for future Nx50G PAM4 modules: 1x50G, 100G (2x50G), 200G (4x50G) and 400G (8x50G)

- ◆ DML technology transmitting **CWDM** wavelengths to enable duplex SMF
- ◆ **1271nm and 1311nm** for optimal performance
- ◆ Baseline configuration for **100G 'WDM2' (FR2/LR2)**

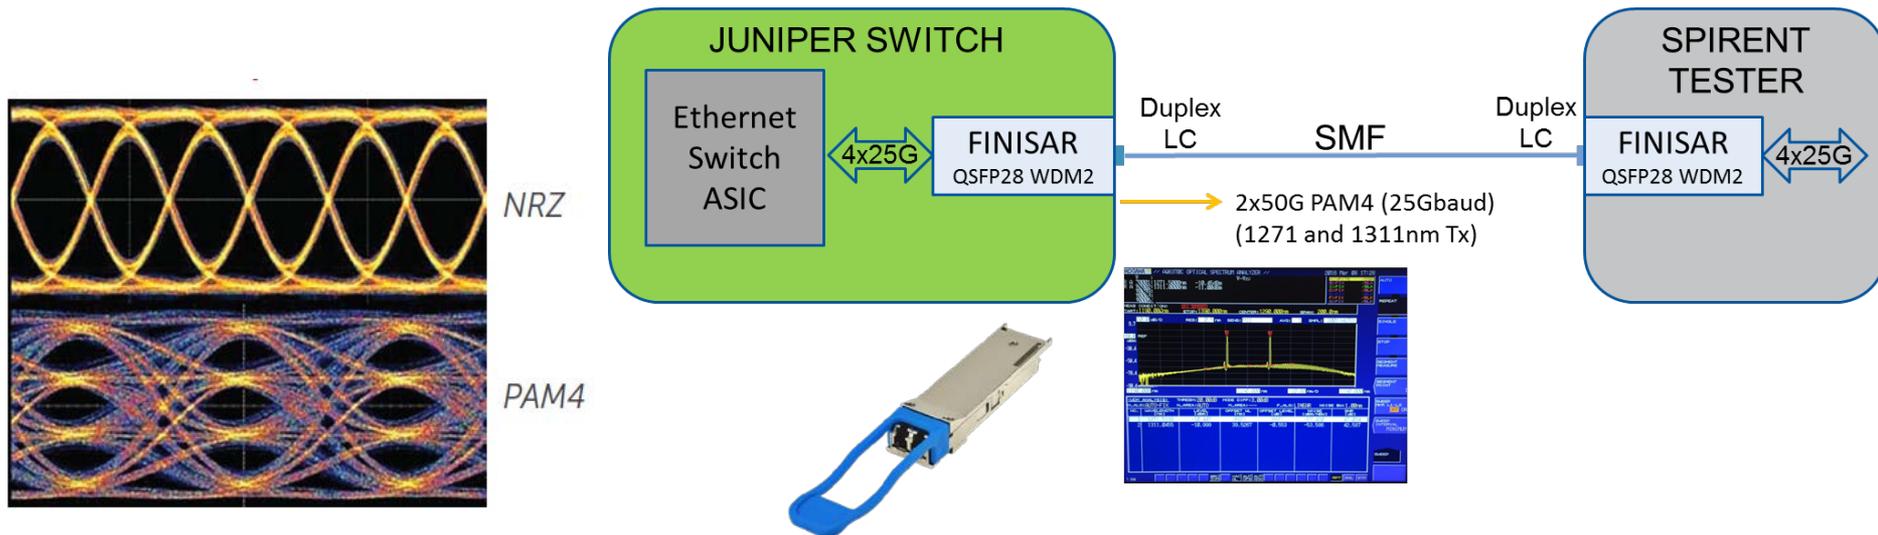

Optical Layer Monitoring in Open Source

FINISAR sponsoring **TWO** initiatives to promote better access to optical layer diagnostic information in network SW stacks:

Open Optical Monitoring:

- ◆ Open Compute (OCP) Networking Project
- ◆ Provides access to monitors and controls inside optical modules and active cables
- ◆ Intuitive Python API for applications and agents
- ◆ Runs on any Linux-based NOS
- ◆ Access v0.5 spec and beta code at:

<http://www.opencompute.org/wiki/Networking/SpecsAndDesigns>

<https://github.com/orgs/ocpnetworking-wip/oom>

sFlow:

- ◆ sFlow.org project
- ◆ Extends sFlow to report optical module management information from SFP/QSFP optical modules
- ◆ A host sFlow agent (sflow.net) has been running without issue for over a month on three production Cumulus Linux switches in the SFMIX network
- ◆ Draft implementation:

http://sflow.org/draft_sflow_optics.txt

- ◆ Source code using the Linux ethtool API is available on github:

<https://github.com/sflow/host-sflow/blob/master/src/Linux/readNioCounters.c#L291-L613>

Intuitive APIs to Access Pluggable Modules

- ◆ Create an **inventory** of all ports SFP+ and QSFP+...
- ◆ Extract **Serial ID** information from each module...
- ◆ Access **Digital Diagnostic Monitoring** information from each module
- ◆ Access **new and value-added** functionality made available by module vendors... example: Finisar Connectivity Diagnostics

- Connectivity Mapping
- Module Health Indication
- Link Troubleshooting
- Link Performance Indication



Example: Optical health metrics – in 4 lines of Python, 'out of the box'

from **oom** import *

for port in **oom**_get_portlist():

enumerate the ports on the switch

status = **oom**_get_memory(port, 'DOM')

DOM = {TX, Rx}Power, temp, bias...

display_module_status(port, status)

your display format here

Summary

- ◆ Large growth in web content and applications is driving:
 - Growth in bandwidth and changes in data center architectures
 - Subsequent growth in number of optical links
 - Large increase in bit rate and low-power requirements
- ◆ 25G, 40G and 100G optics support this growth today with:
 - Smaller module form factors for higher port density
 - Lower power consumption and cost per bit
 - Increased performance to leverage existing fiber infrastructure
- ◆ New Ethernet optics are being standardized and under development
 - 50G, 200G, 400G
- ◆ Open interfaces are coming to the optical layer.
- ◆ Questions?
- ◆ Contact Information
 - E-mail: christian.urricaret@finisar.com
 - www.finisar.com



FINISAR[®]

Thank You

